


END SECTION
SCALE 1:25

SIDE SECTION
SCALE 1:25

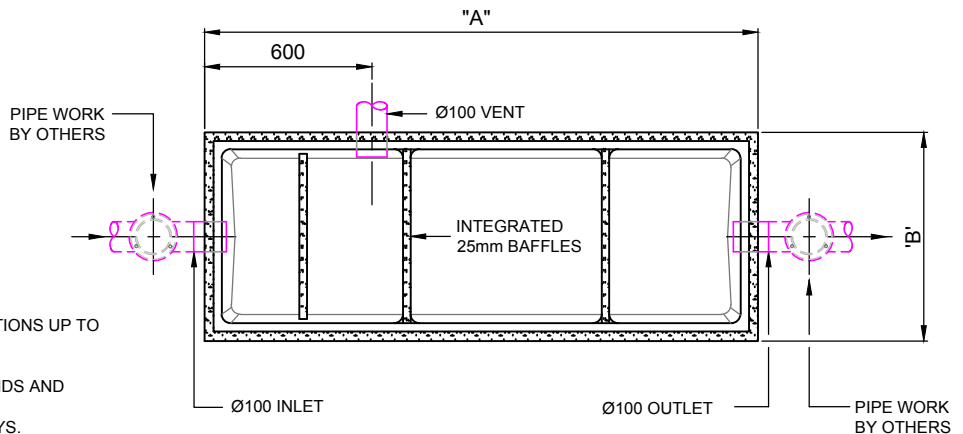

OPEN TANK PLAN VIEW
SCALE 1:25

PRODUCT NOTE:

1. TESTED AND APPROVED FOR INSTALLATIONS UP TO 5000mm DEEP.
2. 300mm RISERS AVAILABLE.
3. LARGE RANGE OF CONCRETE SURROUNDS AND COVERS TO SUIT ALL LOAD RATINGS.
4. MPA RATING FOR GRC - 60 mpa @ 28 DAYS.
5. AVAILABLE EXTRAS:
-STEP IRONS
-SUPPORT FRAME & WORK PLATFORMS FOR ABOVE GROUND INSTALLATIONS.
6. OTHER PVC PIPE SIZES AVAILABLE UPON REQUEST
7. INSTALLATION INSTRUCTIONS MUST BE FOLLOWED.
8. COVER WILL ADD TO OVERALL DEPTH.

PRODUCT CODE	CAPACITY (L)	A	B	C	D	E	F	G	H	MASS (KG)
GA 100	1000	1830	690	1245	1620	730	280	430	1030	324
GA 150	1500	2610	870	1265	1765	730	280	430	1030	677
GA 200	2000	2610	870	1565	2065	730	280	430	1060	812
GA 300 AG*	3000	2610	870	2165	2665	750	300	450	1050	890
GA 300	3000	2610	1400	1565	2065	750	300	450	1050	1200
GA 400	4000	2610	1400	1865	2365	750	300	450	1050	1400

SPECIFICATION

Glass Reinforced Concrete Grease Arrestor must be WSAA (Water Services Association Australian) appraised and free of steel reinforcement to prevent corrosion. Grease Arrestor to be Mascot Engineering GRC litre, model number GA complete with Gastight Access Covers to suit Class load rating to AS3996. Products to be installed as per the manufacturers installation instructions

© Copyright



Since 1920

PRODUCT DESCRIPTION:

GREASE ARRESTOR

ph: 1300 885 295
fax: 1300 885 296
email: sales@mascoteng.com.au
www.mascotengineering.com.au

SCALE:

1:25

REVISION:

A

DRAWING NO:

TW.NSW.GA.001